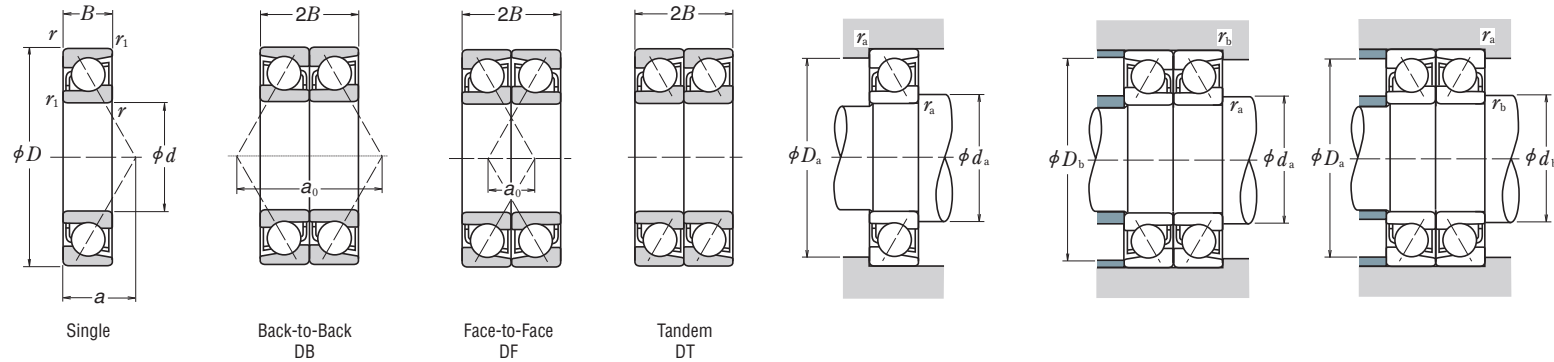


ANGULAR CONTACT BALL BEARINGS**SINGLE/MATCHED MOUNTINGS****Bore Diameter 40 – 55 mm****Dynamic Equivalent Load** $P = XF_r + YF_a$

Contact Angle	$\frac{if_0 F_a}{C_{or}}$	e	Single, DT				DB or DF			
			$F_a/F_r \leq e$		$F_a/F_r > e$		$F_a/F_r \leq e$		$F_a/F_r > e$	
			X	Y	X	Y	X	Y	X	Y
30°	—	0.80	1	0	0.39	0.76	1	0.78	0.63	1.24
40°	—	1.14	1	0	0.35	0.57	1	0.55	0.57	0.93

*For i , use 2 for DB and DF and 1 for DT**Static Equivalent Load** $P_0 = X_0 F_r + Y_0 F_a$

Contact Angle	Single, DT		DB or DF		Single or DT mounting When $F_r > 0.5 F_r + Y_0 F_a$ use $F_0 = F_r$
	X_0	Y_0	X_0	Y_0	
	30°	40°	30°	40°	
30°	0.5	0.33	1	0.66	
40°	0.5	0.26	1	0.52	

Boundary Dimensions (mm)					Basic Load Ratings (Single)		Factor	Limiting Speeds ⁽¹⁾ (min ⁻¹)		Eff. Load Center (mm) a	Abutment and Fillet Dimensions (mm)			Mass (kg) approx.	Bearing Designations ⁽²⁾ Cage Designation ⁽⁴⁾				Basic Load Ratings (Matched) ^(N)		Limiting Speeds ⁽¹⁾ (Matched) (min ⁻¹)		Load Center Spacings (mm) a_0		Abutment and Fillet Dimensions (mm)		
d	D	B	r min.	r_1 min.	C_r (N)	C_{or}		Grease	Oil		d_a min.	D_a max.	r_a max.		Single	Standard	Option	Arrangement	C_r	C_{or}	Grease	Oil	DB	DF	d_b ⁽³⁾ min.	D_b max.	r_b ⁽³⁾ max.
40	80	18	1.1	0.6	40 500	24 500	—	7 500	11 000	34.2	47	73	1	0.357	*7208 BEA	T85	MR, T	— — —	—	—	6 000	8 500	68.3	32.3	45	75	0.6
	90	23	1.5	1	53 500	33 000	—	5 600	7 500	30.3	49	81	1.5	0.633	*7308 A	W	(M), T	DB DF DT	87 000	66 000	4 500	6 000	60.5	14.5	46	84	1
	90	23	1.5	1	55 500	33 000	—	7 100	10 000	38.8	49	81	1.5	0.619	*7308 BEA	T85	MR, T	— — —	—	—	5 600	8 000	77.5	31.5	46	84	1
	90	23	1.5	1	55 500	33 000	—	5 000	6 700	38.8	49	81	1.5	0.644	7308 BEA	W	MR, T	DB DF DT	90 500	65 500	4 000	5 300	77.5	31.5	46	84	1
	90	23	1.5	1	55 500	33 000	—	5 000	6 700	38.8	49	81	1.5	0.644	7308 BEA	W	MR, T	DB DF DT	90 500	65 500	4 000	5 300	77.5	31.5	46	84	1
45	75	16	1	0.6	25 400	18 700	—	7 500	10 000	25.3	51	69	1	0.250	7009 A	W	(M), TYN	DB DF DT	41 500	37 500	6 000	8 500	50.6	18.6	50	70	0.6
	85	19	1.1	0.6	43 500	28 700	—	6 700	9 500	28.3	52	78	1	0.411	7209 A	W	(M), T, TYN	DB DF DT	71 000	57 500	5 600	7 500	56.5	18.5	50	80	0.6
	85	19	1.1	0.6	39 500	26 200	—	5 000	6 700	36.8	52	78	1	0.421	7209 B	W	(M), T	DB DF DT	64 500	52 500	4 000	5 300	73.5	35.5	50	80	0.6
	85	19	1.1	0.6	42 500	27 100	—	7 100	10 000	36.8	52	78	1	0.400	*7209 BEA	T85	MR, T	— — —	—	—	5 600	8 000	73.5	35.5	50	80	0.6
	100	25	1.5	1	70 000	43 500	—	5 000	6 700	33.4	54	91	1.5	0.848	7309 A	W	(M), T	DB DF DT	113 000	87 000	4 000	5 300	66.9	16.9	51	94	1
50	100	25	1.5	1	65 500	39 500	—	6 300	9 000	42.9	54	91	1.5	0.823	*7309 BEA	T85	MR, T	— — —	—	—	5 000	7 100	85.8	35.8	51	94	1
	100	25	1.5	1	65 500	39 500	—	4 500	6 000	42.9	54	91	1.5	0.860	7309 BEA	W	MR, T	DB DF DT	107 000	79 500	3 600	4 800	85.8	35.8	51	94	1
	90	16	1	0.6	26 900	21 100	—	6 700	9 500	26.8	56	74	1	0.263	7010 A	W	(M), T, TYN	DB DF DT	43 500	42 000	5 600	7 500	53.5	21.5	55	75	0.6
	90	20	1.1	0.6	45 500	31 500	—	6 300	9 000	30.2	57	83	1	0.466	7210 A	W	(M), T, TYN	DB DF DT	74 000	63 000	5 000	7 100	60.4	20.4	55	85	0.6
	90	20	1.1	0.6	41 000	28 600	—	4 500	6 300	39.4	57	83	1	0.477	7210 B	W	(M), T	DB DF DT	67 000	57 000	3 600	5 000	78.7	38.7	55	85	0.6
55	90	20	1.1	0.6	44 000	29 700	—	6 300	9 500	39.4	57	83	1	0.453	*7210 BEA	T85	MR, T	— — —	—	—	5 000	7 500	78.7	38.7	55	85	0.6
	110	27	2	1	81 500	52 000	—	4 500	6 000	36.6	60	100	2	1.10	7310 A	W	(M), T	DB DF DT	133 000	104 000	3 600	4 800	73.2	19.2	56	104	1
	110	27	2	1	82 000	50 500	—	5 600	8 000	47.1	60	100	2	1.07	*7310 BEA	T85	MR, T	— — —	—	—	4 500	6 700	94.1	40.1	56	104	1
	110	27	2	1	82 000	50 500	—	4 000	5 600	47.1	60	100	2	1.11	7310 BEA	W	MR, T	DB DF DT	133 000	101 000	3 200	4 500	94.1	40.1	56	104	1
	90	18	1.1	0.6	35 500	27 700	—	6 300	8 500	29.9	62	83	1	0.391	7011 A	W	(M), T, TYN	DB DF DT	57 500	55 500	5 000	6 700	59.9	23.9	60	85	0.6

- Notes** ⁽¹⁾ For applications operating near the limiting speed, refer to Page C077.
⁽²⁾ Suffixes A and B represent contact angles of 30° and 40° respectively.
⁽³⁾ Use the values of d_a (min) and r_a (max) for bearings with "—" in the d_b column.

- Note** ⁽⁴⁾ Cage designation (M) is usually omitted from the bearing designation.
Remark Bearings with an asterisk (*) are high-accuracy angular contact ball bearings. In arrangements, they are limited to SU universal matching types. See Page C073 for details.