


1.1 Single row deep groove ball bearings

d 65 – 70 mm

1.1

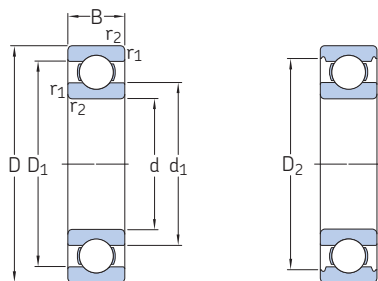

2Z

2RZ




2RS1

Principal dimensions			Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designations	
d	D	B	C	C ₀	P _u	Reference speed	Limiting speed ¹⁾		Bearing open or capped on both sides	capped on one side ¹⁾
mm			kN		kN	r/min		kg	–	
65 cont.	120	23	58,5	40,5	1,73	12 000	7 500	1	► 6213	–
	120	23	58,5	40,5	1,73	–	3 600	1,05	► 6213-2RS1	6213-RS1
	120	23	58,5	40,5	1,73	12 000	6 000	1,05	► 6213-2Z	6213-Z
	120	31	55,9	40,5	1,73	–	3 600	1,4	62213-2RS1	–
	140	33	97,5	60	2,5	10 000	6 700	2,55	6313 M	–
	140	33	97,5	60	2,5	10 000	6 700	2,1	► 6313	–
	140	33	97,5	60	2,5	–	3 200	2,15	► 6313-2RS1	6313-RS1
	140	33	97,5	60	2,5	10 000	5 300	2,15	► 6313-2Z	6313-Z
	140	48	92,3	60	2,5	–	3 200	3	62313-2RS1	–
	160	37	119	78	3,15	9 500	6 000	3,35	6413	–
70	90	10	12,4	13,2	0,56	–	4 300	0,14	► 61814-2RS1	–
	90	10	12,4	13,2	0,56	15 000	7 500	0,14	► 61814-2RZ	–
	90	10	12,4	13,2	0,56	15 000	9 000	0,14	► 61814	–
	100	16	23,8	18,3	0,9	14 000	8 500	0,34	► 61914	–
	100	16	23,8	21,2	0,9	–	4 000	0,35	61914-2RS1	–
	100	16	23,8	21,2	0,9	14 000	7 000	0,35	61914-2RZ	–
	110	13	29,1	25	1,06	13 000	8 000	0,44	► 16014	–
	110	20	39,7	31	1,32	13 000	11 000	0,7	6014 M	–
	110	20	39,7	31	1,32	13 000	8 000	0,61	► 6014	–
	110	20	39,7	31	1,32	–	3 600	0,63	► 6014-2RS1	6014-RS1
	110	20	39,7	31	1,32	13 000	6 300	0,64	► 6014-2Z	6014-Z
	125	24	60,5	45	1,9	11 000	10 000	1,3	6214 M	–
	125	24	63,7	45	1,9	11 000	7 000	1,1	► 6214	–
	125	24	63,7	45	1,9	–	3 400	1,1	► 6214-2RS1	6214-RS1
	125	24	63,7	45	1,9	11 000	5 600	1,15	► 6214-2Z	6214-Z
	125	31	60,5	45	1,9	–	3 400	1,4	62214-2RS1	–
	150	35	111	68	2,75	9 500	6 300	2,55	► 6314	–
	150	35	111	68	2,75	9 500	6 300	3,1	6314 M	–
	150	35	111	68	2,75	–	3 000	2,6	► 6314-2RS1	6314-RS1
	150	35	111	68	2,75	9 500	5 000	2,65	► 6314-2Z	6314-Z
	150	51	104	68	2,75	–	3 000	3,75	62314-2RS1	–
	180	42	143	104	3,9	8 500	5 300	4,95	6414	–

SKF Explorer bearing

► Popular item

1) For bearings with only one shield or one non-contact seal (Z, RZ) the limiting speeds of the open bearings are valid.

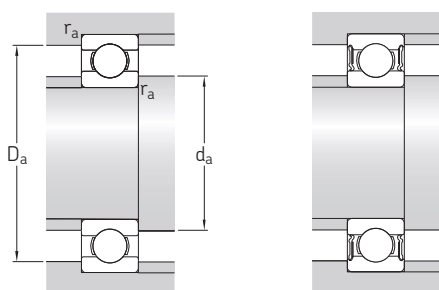

Dimensions						Abutment and fillet dimensions				Calculation factors	
d	d ₁ ≈	d ₂ ≈	D ₁ ≈	D ₂ ≈	r _{1,2} min.	d _a min.	d _a max.	D _a max.	r _a max.	k _r	f ₀
mm						mm				–	
65 cont.	83,3	–	–	106	1,5	74	–	111	1,5	0,025	15
	83,3	–	–	106	1,5	74	83	111	1,5	0,025	15
	83,3	–	–	106	1,5	74	83	111	1,5	0,025	15
	83,3	–	–	106	1,5	74	83	111	1,5	0,025	15
	88,3	–	–	122	2,1	77	–	128	2	0,03	13
	88,3	–	–	122	2,1	77	–	128	2	0,03	13
	88,3	–	–	122	2,1	77	88	128	2	0,03	13
	88,3	–	–	122	2,1	77	88	128	2	0,03	13
	88,3	–	–	122	2,1	77	88	128	2	0,03	13
	94	–	131	–	2,1	79	–	146	2	0,035	12
	76,4	–	–	85,5	0,6	74	76	86	0,6	0,015	17
	76,4	–	–	85,5	0,6	74	76	86	0,6	0,015	17
70	76,4	–	83,9	–	0,6	74	–	86	0,6	0,015	17
	79,8	–	–	92,9	1	75	–	95	1	0,02	14
	79,8	–	–	92,9	1	75	79	95	1	0,02	16
	79,8	–	–	92,9	1	75	79	95	1	0,02	16
	83,3	–	96,8	–	0,6	74	–	106	0,6	0,02	16
	82,8	–	–	99,9	1,1	76	–	104	1	0,025	16
	82,8	–	–	99,9	1,1	76	–	104	1	0,025	16
	82,8	–	–	99,9	1,1	76	82	104	1	0,025	16
	82,8	–	–	99,9	1,1	76	82	104	1	0,025	16
	87	–	–	111	1,5	79	–	116	1,5	0,025	15
	87	–	–	111	1,5	79	–	116	1,5	0,025	15
	87	–	–	111	1,5	79	87	116	1,5	0,025	15
	87	–	–	111	1,5	79	87	116	1,5	0,025	15
	87	–	–	111	1,5	79	87	116	1,5	0,025	15
	94,9	–	–	130	2,1	82	–	138	2	0,03	13
	94,9	–	–	130	2,1	82	–	138	2	0,03	13
	94,9	–	–	130	2,1	82	94	138	2	0,03	13
	94,9	–	–	130	2,1	82	94	138	2	0,03	13
	94,9	–	–	130	2,1	82	94	138	2	0,03	13
	103	–	146	–	3	86	–	164	2,5	0,035	12